



US008089792B2

(12) **United States Patent**
Inagawa et al.

(10) **Patent No.:** **US 8,089,792 B2**
(45) **Date of Patent:** **Jan. 3, 2012**

(54) **CYCLOCONVERTER GENERATOR**

FOREIGN PATENT DOCUMENTS

(75) Inventors: **Toshinori Inagawa**, Wako (JP);
Shinsaku Nakayama, Wako (JP);
Yoshinori Masubuchi, Wako (JP)

EP 1 126 589 A2 8/2001
JP 11-136998 5/1999
JP 3447934 B2 7/2003

(73) Assignee: **Honda Motor Co., Ltd.**, Tokyo (JP)

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 429 days.

Peter Nielson et al., "New Protection Issues of a Matrix Converter: Design Considerations for Adjustable-Speed Drives", IEEE Transactions on Industry Applications, Sep. 12, 1999, vol. 35, No. 5, Piscataway, NJ.

* cited by examiner

(21) Appl. No.: **12/436,367**

(22) Filed: **May 6, 2009**

Primary Examiner — Shawn Riley

(65) **Prior Publication Data**

(74) *Attorney, Agent, or Firm* — Arent Fox LLP

US 2009/0279338 A1 Nov. 12, 2009

(30) **Foreign Application Priority Data**

(57) **ABSTRACT**

May 9, 2008 (JP) 2008-123325

In a cycloconverter generator, there are provided, q number of power circuits that supply rectified DC power of a DC power supply unit as operating power to the p(p>q) number of thyristors, and r(r>p) number of thyristor drive circuits that are connected to the q number of the power circuits and drive the p number of the thyristors, wherein the r number of the thyristor drive circuits are individually used to drive in common ones among the p number of the thyristors whose operation is unaffected even if driven at the same timing such that the number r of the drive circuits is made smaller than the number p of the thyristors, thereby enabling to simplify circuit configuration.

(51) **Int. Cl.**
H02M 7/521 (2006.01)

(52) **U.S. Cl.** **363/136**

(58) **Field of Classification Search** 363/37,
363/136, 138, 137, 160
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,056,766 A * 11/1977 Zander 363/37
4,468,725 A 8/1984 Venturini

5 Claims, 11 Drawing Sheets

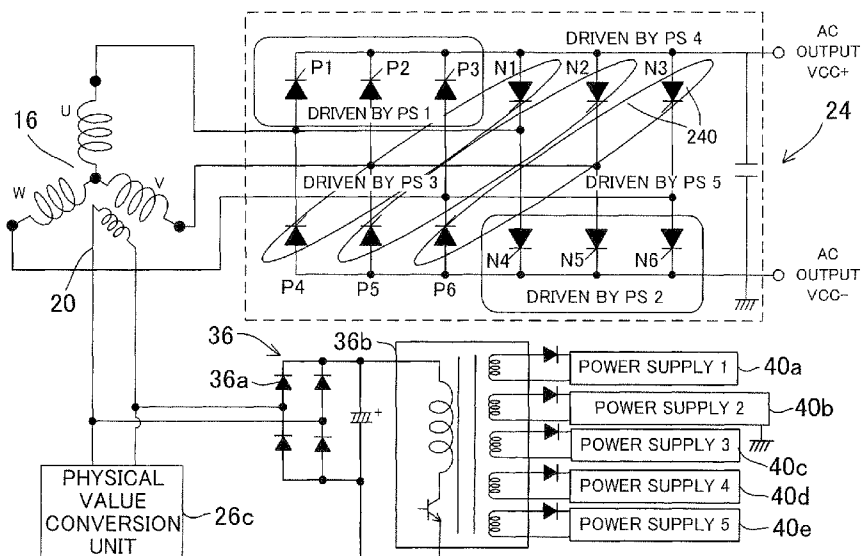


FIG. 1

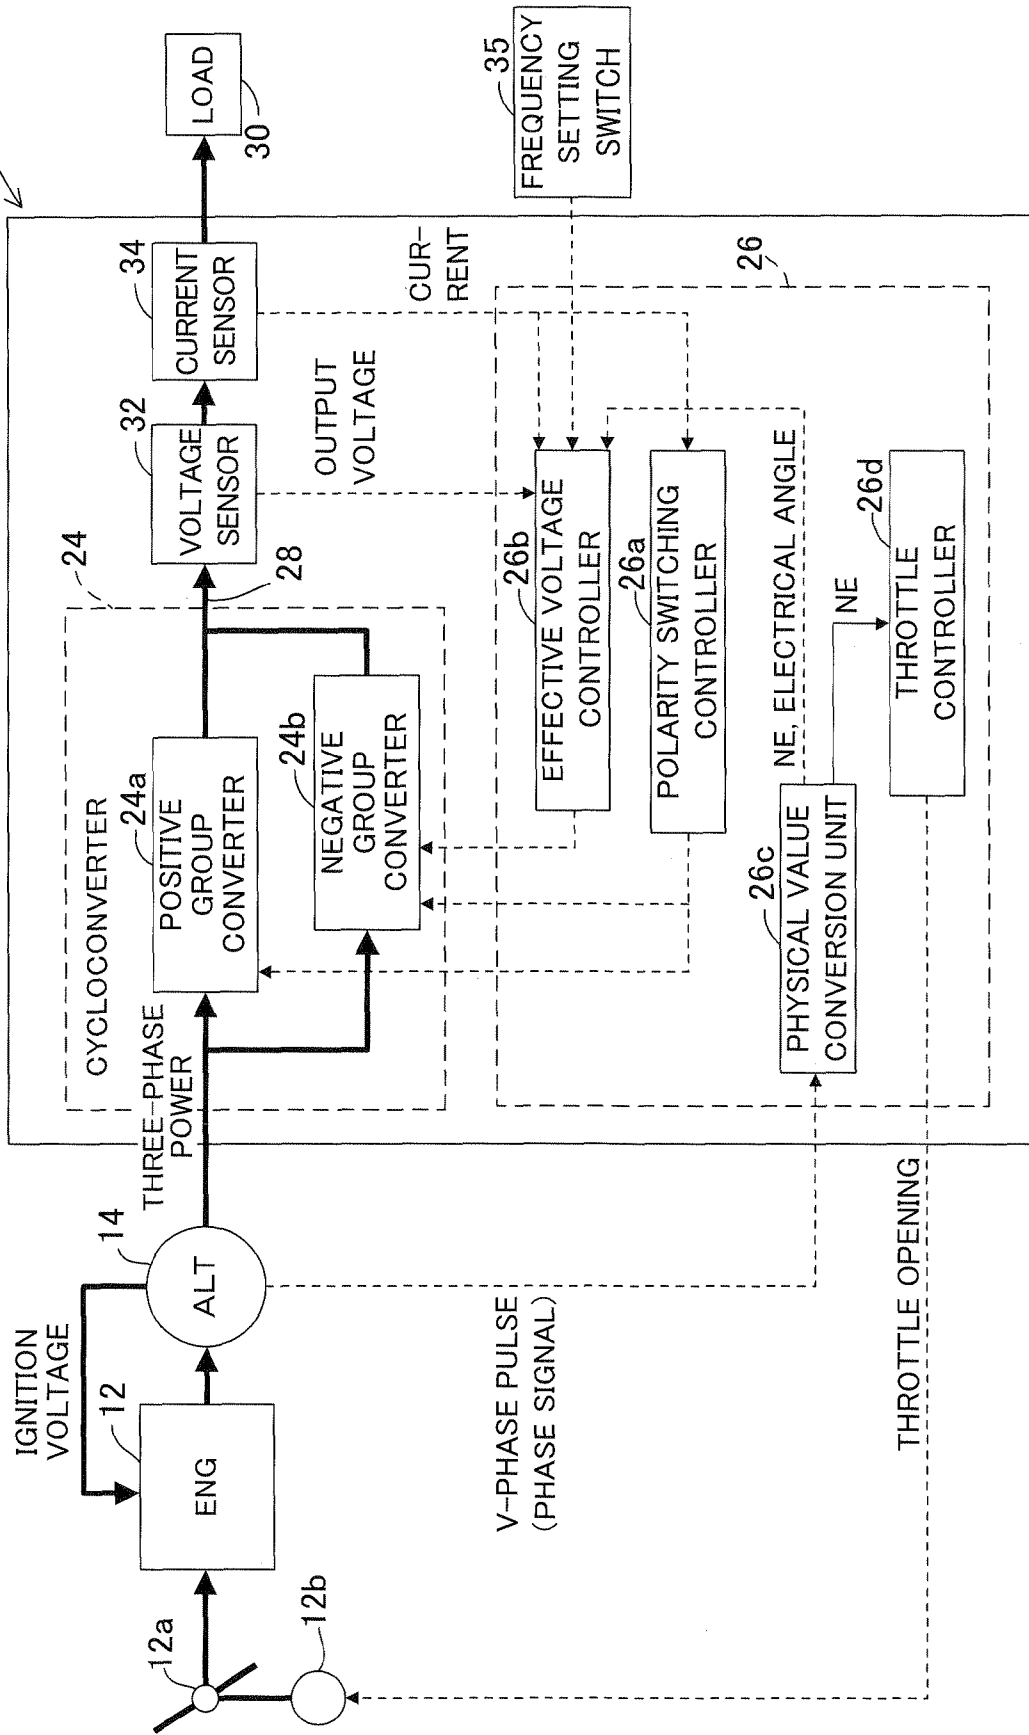


FIG. 3

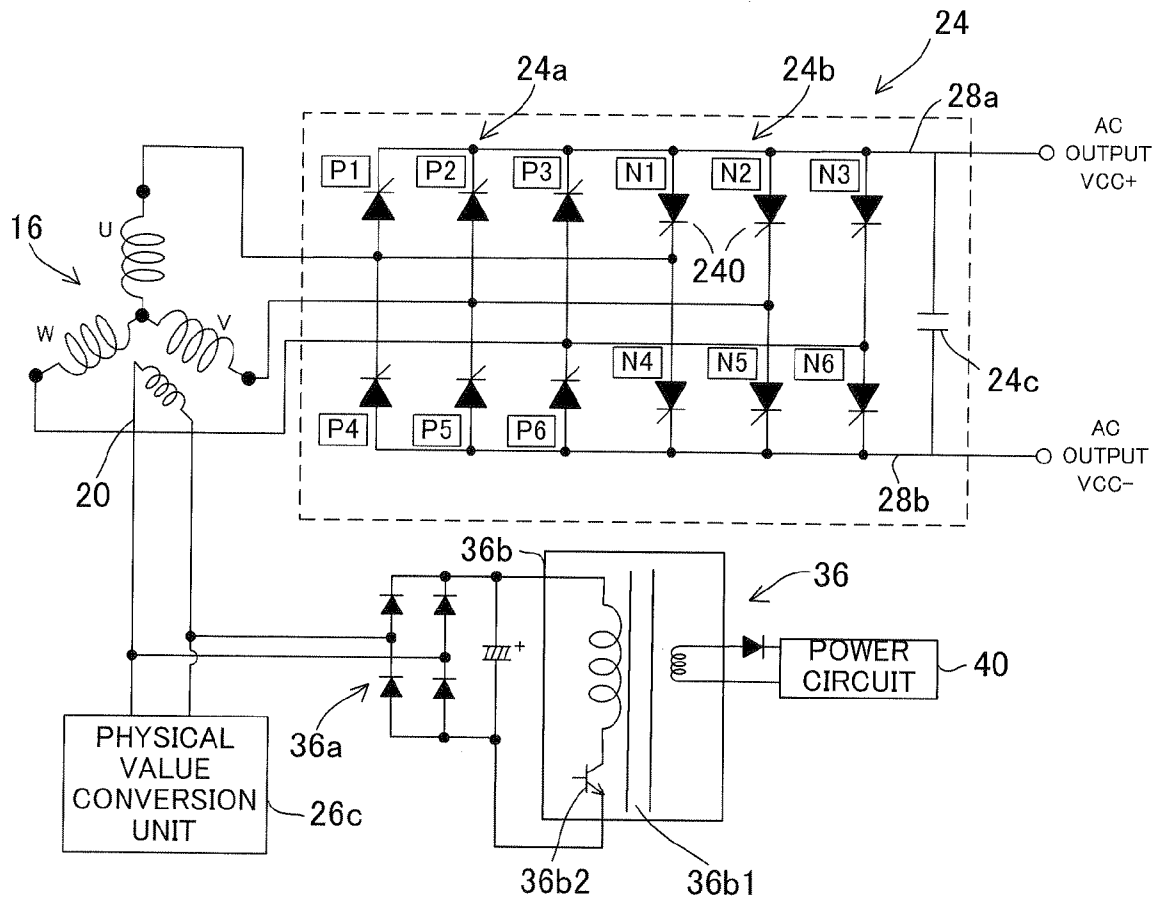


FIG. 4

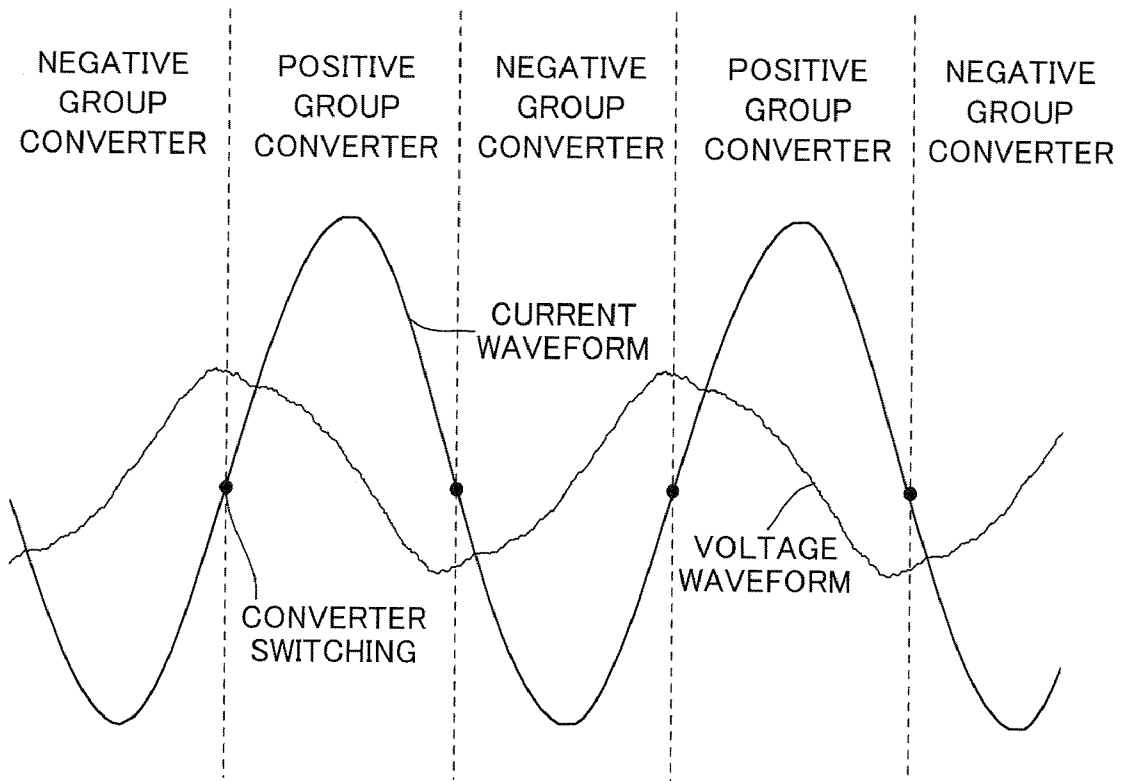


FIG. 5

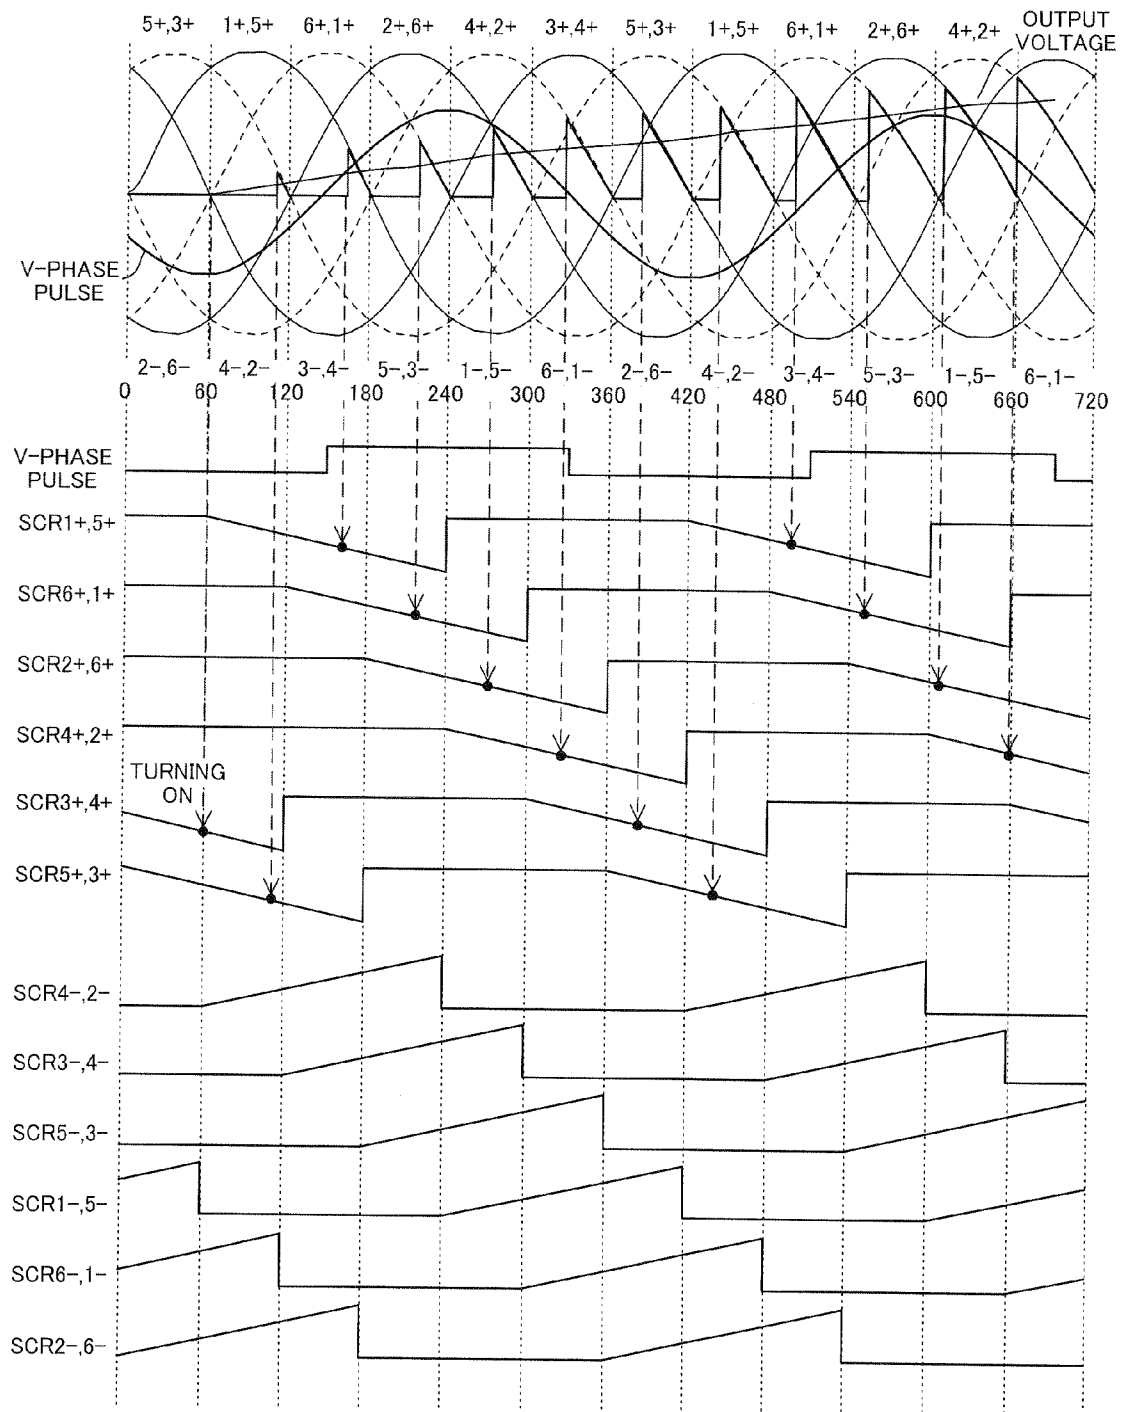


FIG. 6

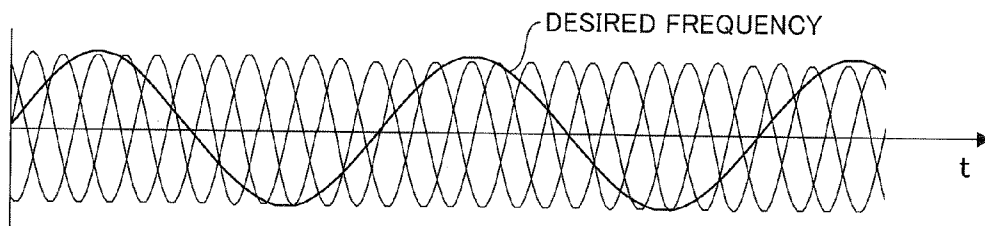


FIG. 7

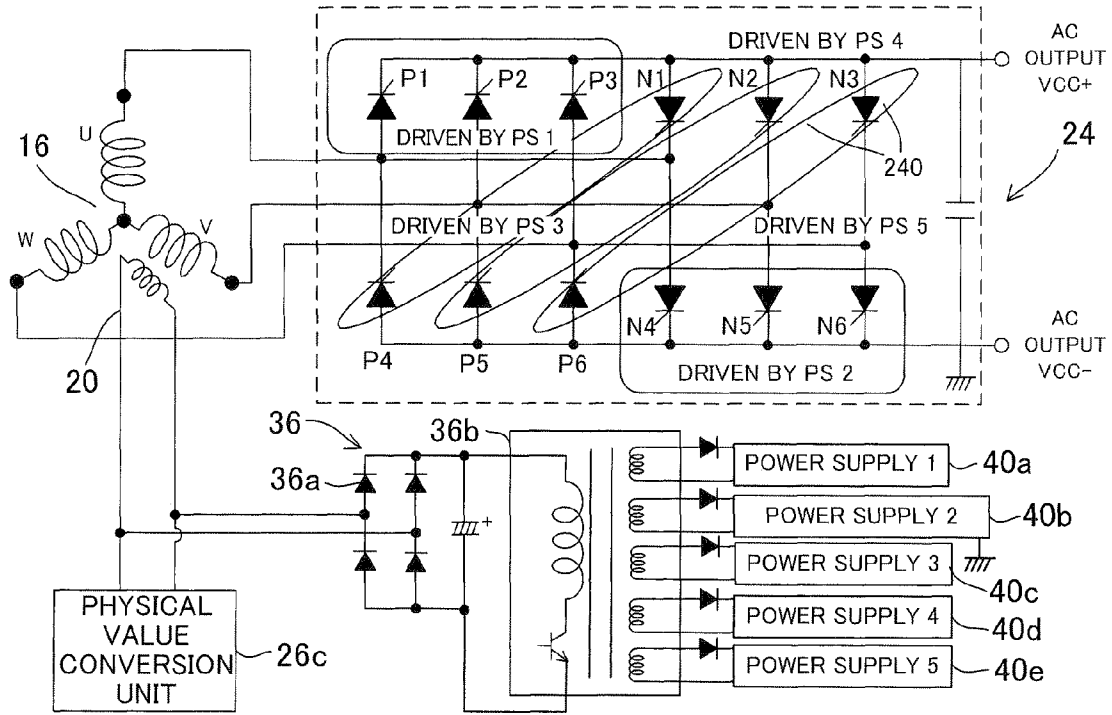


FIG. 8

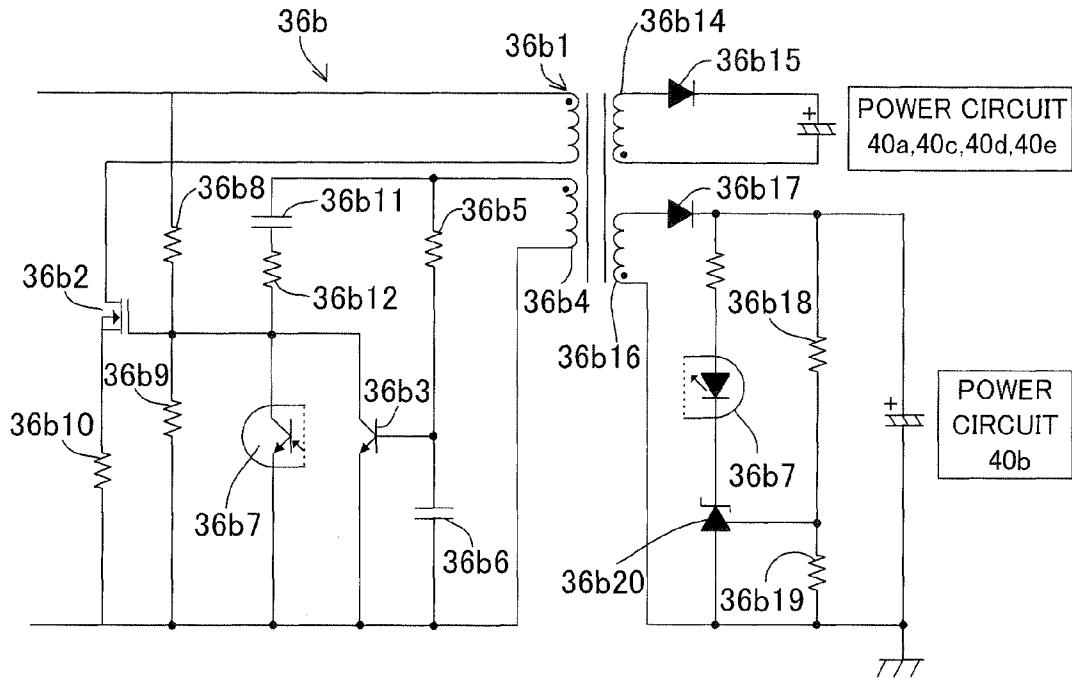


FIG. 9

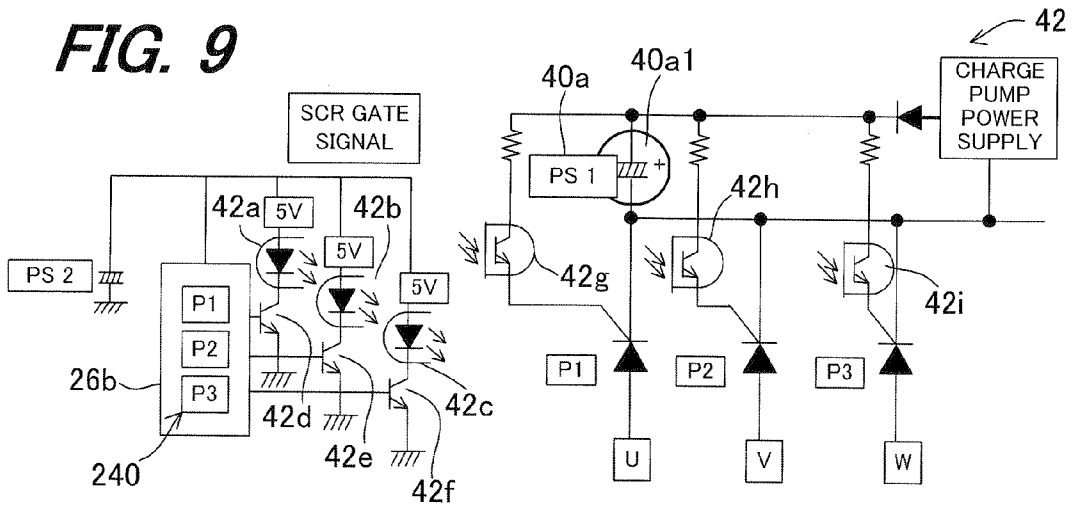


FIG. 10

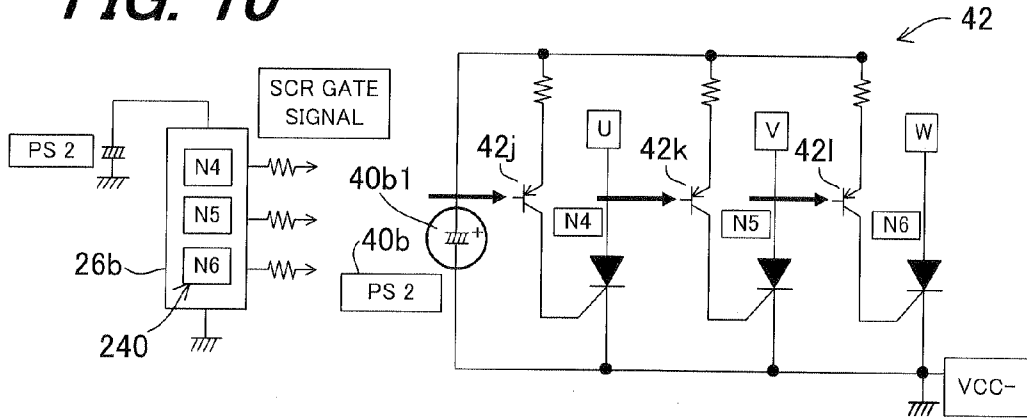


FIG. 11

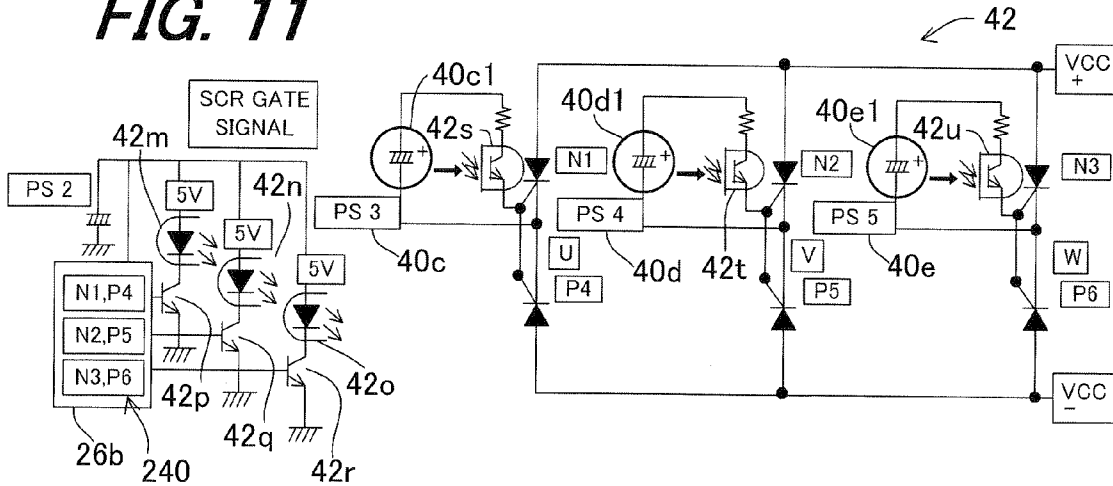


FIG. 12

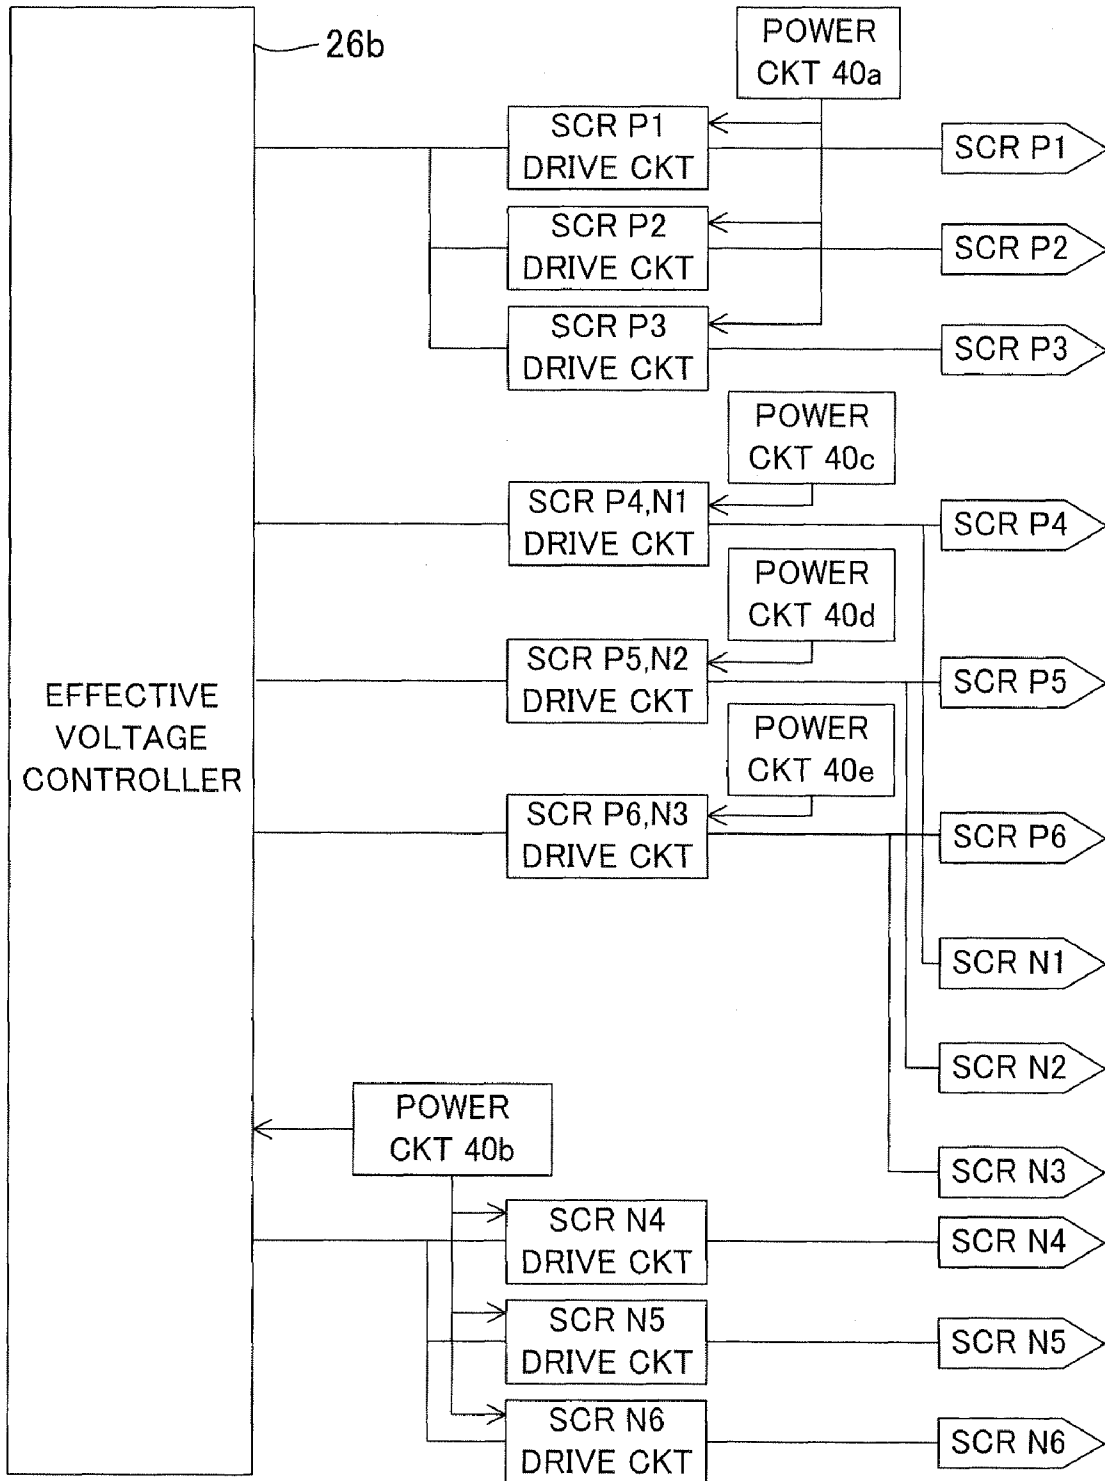


FIG. 13

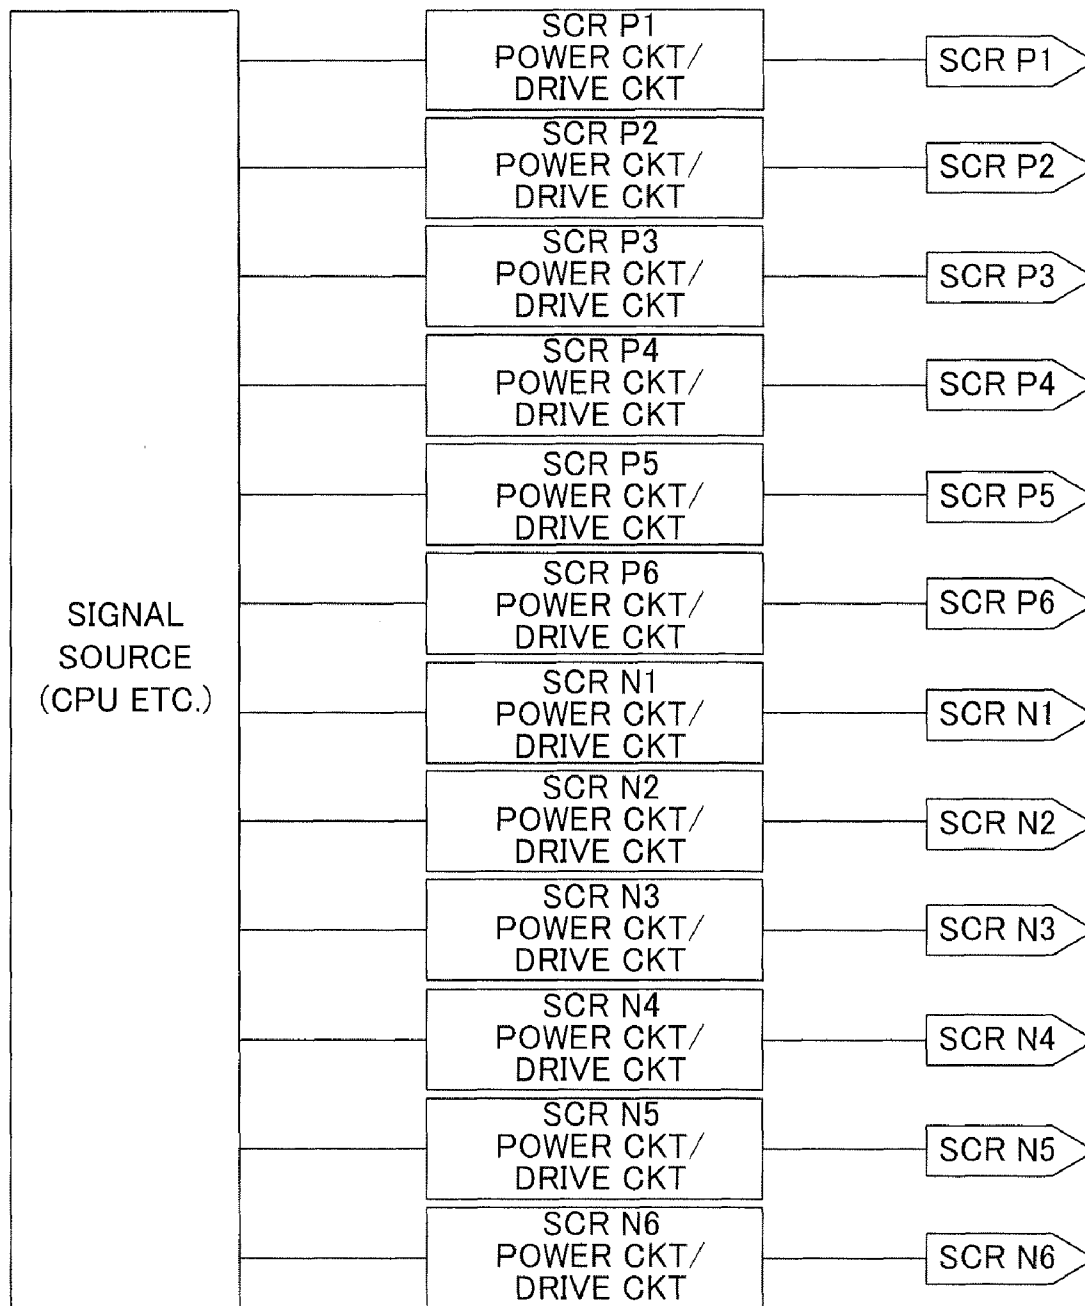


FIG. 14


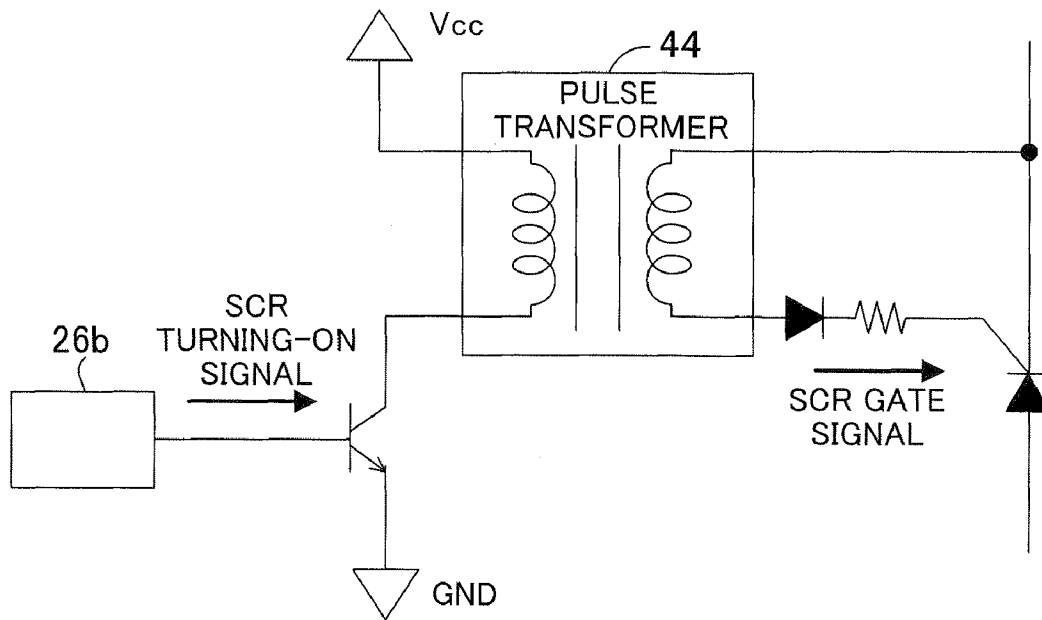


FIG. 15

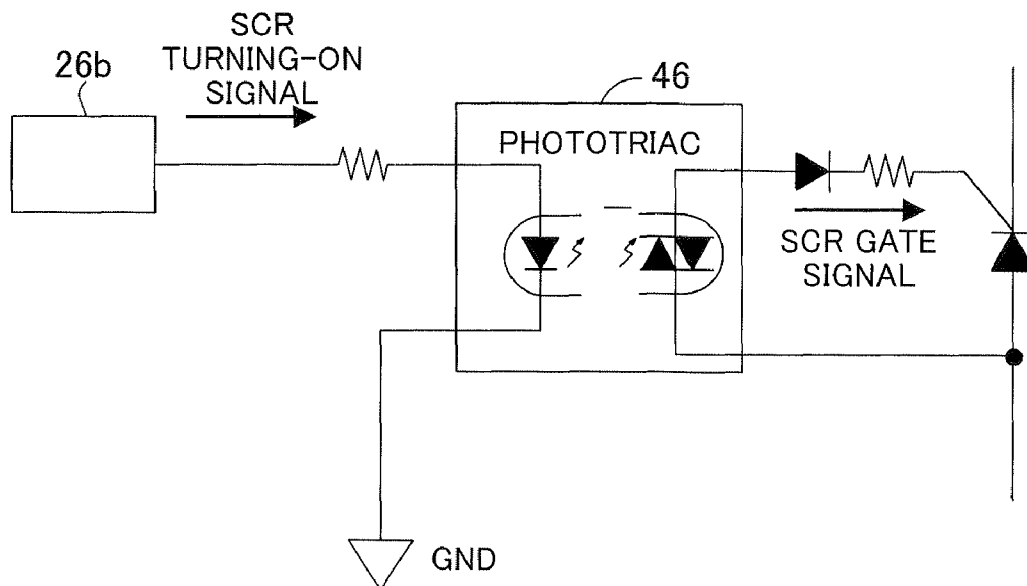

1

CYCLOCONVERTER GENERATOR

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to a cycloconverter generator, namely a generator that converts AC power of a given frequency to another frequency for output.

2. Description of the Related Art

The cycloconverter generator that produces an output by converting AC power of a given frequency to another frequency is well known. A description of the cycloconverter generator technology can be found, for example, in Japanese Patent No. 3447934. The cycloconverter generator described in this reference is equipped with twelve thyristors bridge-connected in antiparallel connection to three-phase output windings in the positive and negative directions and generates single-phase alternating current of a desired frequency by turning on the thyristors at variable timing (width or angle) every half-period of the desired alternating current frequency.

SUMMARY OF THE INVENTION

This type of cycloconverter generator has a complicated circuit configuration because each of the twelve thyristors is generally driven independently by a separately provided power circuit and drive circuit.

An object of this invention is therefore to overcome this drawback by providing a cycloconverter generator having a simpler circuit configuration with a reduced number of thyristor power circuits and drive circuits.

In order to achieve the first objects, this invention provides a cycloconverter generator equipped with a magneto having three-phase output windings, single-phase output windings facing the permanent magnets to produce phase signals each indicative of a phase of the output of the magneto, a bridge circuit comprising p number of thyristors bridge-connected in antiparallel connection to the three-phase output windings to constitute a cycloconverter, and a bridge drive circuit that generates single-phase AC power to be supplied to a load by turning on the p number of the thyristors of the bridge circuit at variable timing every half-period of a desired AC power frequency based on the phase signal; comprising: a single DC power supply unit that is connected to the single-phase output winding and rectifies AC power outputted by the single-phase output winding to DC power; q number of power circuits that are connected to the DC power supply unit and supply the rectified DC power as operating power to the p ($p > q$) number of the thyristors; and r ($p > r$) number of thyristor drive circuits that are connected to the q number of the power circuits and drive the p number of the thyristors, wherein the r number of the thyristors drive circuits are individually used to drive in common ones among the p number of the thyristors whose operation is unaffected even if driven at the same timing such that the number r of the drive circuits is made smaller than the number p of the thyristors.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and advantages of the invention will be more apparent from the following description and drawings in which:

FIG. 1 is a block diagram showing the overall configuration of a cycloconverter generator according to this embodiment of the present invention;

FIG. 2 is a plan view of a stator constituting a magneto shown in FIG. 1;

2

FIG. 3 is a block diagram showing the structure of a SCR (thyristor) converter shown in FIG. 1 in detail;

FIG. 4 is a time chart showing the operation of switching (selecting) the SCR converter when converting to alternating current by a polarity switching controller of an electronic control unit (ECU) shown in FIG. 1;

FIG. 5 is a time chart similarly showing the operation of turning-on the SCR converter by an effective voltage controller of the ECU shown in FIG. 1 when converting to alternating current;

FIG. 6 is a time chart of a desired frequency waveform used in the turning-on operation of the SCR converter shown in FIG. 5;

FIG. 7 is a block diagram similar to FIG. 3, but showing the SCR converter, which shows power circuits and the like of the FIG. 3 configuration in greater detail;

FIG. 8 is a circuit diagram concretely illustrating the configuration of a regulated DC power supply unit (RCC) shown in FIG. 7;

FIG. 9 is a detailed circuit diagram showing the power circuit of FIG. 7 and a drive circuit of thyristors connected thereto;

FIG. 10 is a detailed circuit diagram similarly showing the power circuit of FIG. 7 and the drive circuit of the thyristors connected thereto;

FIG. 11 is a detailed circuit diagram similarly showing the power circuit of FIG. 7 and the drive circuit of the thyristors connected thereto;

FIG. 12 is an explanatory diagram showing the layout of the power circuits and the like in the cycloconverter generator according to this embodiment;

FIG. 13 is an explanatory diagram similar to FIG. 12, but showing a prior art cycloconverter generator;

FIG. 14 is a circuit diagram showing another example of the drive circuit of the thyristors shown in FIG. 9 and the like; and

FIG. 15 is a circuit diagram similarly showing still another example of the drive circuit of the thyristors shown in FIG. 9 and the like.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 1 is a block diagram showing the overall configuration of the cycloconverter generator according to the present invention.

Reference numeral 10 is assigned to the cycloconverter generator in FIG. 1. The generator 10 is equipped with an internal combustion engine 12 (named ENG in the drawing). It has rated outputs of AC 100 V-2.3 kVA and DC 12 V-10 A. The engine 12 is an air-cooled, spark ignition unit whose throttle valve 12a is moved by an actuator 12b comprising a stepper motor or the like. It is started using a recoil starter (not shown).

The generator 10 is equipped with a magneto 14 (named ALT in FIG. 1) that is driven by the engine 12.

FIG. 2 is a plan view of a stator 14a of the magneto 14.

The stator 14a is equipped with a stator core 14a1 fastened near the cylinder head of the engine 12. As illustrated, twenty-seven teeth 14a2 are formed to project radially from the stator core 14a1. Twenty-four of the teeth 14a2 are wound with coils Un, Vn and Wn (n: 1 to 8) to form three-phase (U, V and W) output windings (main windings) 16.

Among the three teeth 14a21, 14a22 and 14a23 located between coils U1 and W8, the tooth 14a21 corresponding to W phase is not wound with a coil, while the tooth 14a22

corresponding to V phase and the tooth **14a23** corresponding to U phase are wound with coils to form single-phase output windings **20** and **22**.

A rotor **14b** is installed around the stator **14a**. Nine pairs of permanent magnets **14b1** (18 magnets) are attached inside the rotor **14b** at positions opposite the aforesaid coils and with their radially oriented polarities reversed alternately as illustrated. Two permanent magnets **14b1** (e.g., **14b11** and **14b12**) form one pair, and one pair of the permanent magnets **14b1** is installed per three teeth **14a2**. The rotor **14b** also serves as the flywheel of the engine **12**.

When the permanent magnets **14b1** of the rotor **14b** surrounding the stator **14a** rotate, three-phase alternating current is outputted from the three-phase output windings **16** and single-phase alternating current is outputted from the single-phase output winding **20**, i.e., V-phase pulses (phase signal) indicating the phase of the output of the magneto **14**, more exactly the output of the output windings **16**, are outputted from the single-phase output winding **20**. As further explained below, the output of the single-phase output winding **20** is rectified and used as a power circuit. Single-phase alternating current is also outputted from the output winding **22**.

Returning to the explanation of FIG. 1, the three-phase alternating current generated by the magneto **14** is inputted to a bridge circuit **24** of the cycloconverter.

FIG. 3 is a block diagram showing the structure of the bridge circuit **24** of the cycloconverter in detail. As illustrated, the bridge circuit **24** comprises a positive group converter **24a**, a negative group converter **24b** and a smoothing capacitor **24c**.

The positive group converter **24a** comprises a total of six thyristors (SCRs) P_n (n: 1 to 6) arranged in three parallel connected pairs with their cathodes facing the positive side. The negative group converter **24b** comprises the same number of thyristors (SCRs) N_n (n: 1 to 6) arranged in three parallel connected pairs with their cathodes facing the negative side. In the following, the thyristors (SCRs) are referred to collectively by the reference numeral **240**.

Thus the bridge circuit **24** is structured as a bridge circuit comprising p number (p: 12) of thyristors bridge-connected in antiparallel connection to the three-phase output windings **16** in the positive and negative sides to constitute a cycloconverter.

The output terminals of the three-phase output windings **16** are connected to midpoints of the paired thyristors **240**. In other words, in the bridge circuit **24**, the positive group converter **24a** and negative group converter **24b** are bridge-connected in antiparallel connection to the three-phase output windings **16**.

Returning to the explanation of FIG. 1, the bridge circuit **24** is connected to an Electronic Control Unit (ECU) **26**.

The ECU **26** is equipped with a polarity switching controller **26a**, an effective voltage controller **26b**, a physical value conversion unit **26c**, and a throttle controller **26d**. The ECU **26** includes a microcomputer equipped with a CPU, ROM, RAM, I/O ports and the like, and the aforesaid polarity switching controller **26a**, etc., are operations of the CPU expressed functionally.

As explained further later, the polarity switching controller **26a** of the ECU **26** selects (switches to) the one of the positive group converter **24a** and negative group converter **24b** of the bridge circuit **24** whose thyristors are to be turned on, and the effective voltage controller **26b** controls their turning timing (angle or width). The three-phase alternating current inputted in this manner is converted to single-phase alternating current that is supplied to a load **30** through a power feed line **28**.

As illustrated, the V-phase pulses (phase signal) outputted from the output winding **20** are sent through the physical value conversion unit **26c** of the ECU **26** to the polarity switching controller **26a** and effective voltage controller **26b**. The physical value conversion unit **26c** counts the V-phase pulses to detect the engine speed NE. The output of the output winding **22** is wave-formed and supplied as ignition voltage to an ignition coil, etc., of an ignition system (not shown) of the engine **12**.

The engine speed NE detected by the physical value conversion unit **26c** is sent to the throttle controller **26d**. The throttle controller **26d** uses a self-tuning regulator to regulate the operation of the actuator **12b** so as to control the opening/closing of the throttle valve **12a** as required to converge the detected engine speed NE to the desired engine speed NED. The details of this control will not be explained here because they are not directly related to the purport of the invention.

The detected engine speed NE and the phase signal are sent to the effective voltage controller **26b**. A voltage sensor **32** and a current sensor **34** are installed in the power feed line **28** and produce outputs or signals proportional to the voltage and current of the power feed line **28**. The outputs of the voltage sensor **32** and current sensor **34** are sent to the polarity switching controller **26a** and effective voltage controller **26b**.

A frequency setting switch (SW) **35** that the operator can use to set or input the desired frequency (60 Hz or 50 Hz according to the commercial power system to be emulated) is provided on the control panel (not shown) of the cycloconverter generator **10** or at some other appropriate location readily accessible to the operator.

The operation of the polarity switching controller **26a** and effective voltage controller **26b** will next be explained regarding the case of converting the three-phase alternating current to single-phase alternating current of the desired frequency of 60 Hz (or 50 Hz) of a commercial power system.

In this case, as shown in FIG. 4, the polarity switching controller **26a** determines which between the positive group converter **24a** and negative group converter **24b** is to be turned on based on the inclination of alternating current detected by the current sensor **34**.

Specifically, the polarity switching controller **26a** determines that the positive group converter **24a** is to be turned on when the detected current exceeds the 0 level on the positive side and that the negative group converter **24b** is to be turned on when it exceeds the 0 level on the negative side.

Based on the aforesaid phase signal and reference sawtooth waves, like those shown in FIG. 5, generated for respective ones of the **12** thyristors **240** (designated SCR_{n+}, n- in the drawing) of the positive group converter **24a** and negative group converter **24b**, and based on the a desired frequency waveform, like that shown in FIG. 6, set by the operator using the frequency setting switch SW**35** and the results of comparisons performed by comparators (not shown) installed in association with respective ones of the twelve thyristors **240**, the effective voltage controller **26b** turns on the thyristors at the timings indicated by arrows in the drawing, thereby controlling the effective output voltage to the desired voltage. In FIG. 5, the voltages applied between UV, VW and WU are represented by solid curves and the voltages reversely applied between VU, WV, UW are represented by broken curves.

As shown in FIG. 3, the generated single-phase alternating current controlled to the desired effective voltage by the effective voltage controller **26b** is smoothed by the smoothing capacitor **24c** and supplied to the load **30** through the power feed line **28**, more exactly power feed lines **28a** and **28b**. Thus, the cycloconverter is composed of the bridge circuit **24** and ECU **26**.

The power circuits of the thyristors **240** will now be explained.

As shown in FIG. **3**, the single-phase output winding **20** is connected to the physical value conversion unit **26c** of the ECU **26**, and is also connected to a single DC power supply unit, more exactly to a regulated DC power supply unit **36**. The regulated DC power supply unit **36** is equipped with a rectifier circuit **36a** and a flyback converter, more specifically a Ringing Choke Converter (RCC) **36b**.

The rectifier circuit **36a** is a conventional single-phase, full-wave rectifier circuit comprising four bridge-connected diodes and a smoothing capacitor. The output of the single-phase output winding **20** is rectified by the four diodes, whereafter ripples are removed from the rectified output by the smoothing capacitor.

The RCC **36b** is equipped with a transformer **36b1**. Power is stored in the transformer **36b1** when a primary-side transistor **36b2** is turned on (conductive) and the stored power is transferred to the secondary winding when the transistor **36b2** is turned off (nonconductive).

Power circuits (collectively designated by reference numeral **40**) are connected to the secondary side of the RCC **36b**. The power circuits **40** are circuits for supplying rectified 5 V DC power as operating power to the twelve thyristors.

FIG. **7** is a block diagram of the bridge circuit **24** similar to that of FIG. **3**, which shows the power circuits **40** and the like of the FIG. **3** configuration in greater detail. As shown by the detailed diagram of FIG. **7**, the power circuits **40** include power circuits **40a**, **40b**, **40c**, **40d**, and **40e**, which constitute power supplies **1**, **2**, **3**, **4** and **5**.

FIG. **8** is a circuit diagram concretely illustrating the configuration of the RCC **36b** shown in FIG. **7**. As illustrated, the RCC **36b** is equipped with the FET **36b2** connected to the primary-side main coil of the transformer **36b1**. The gate of the FET **36b2** is connected to the emitter of a transistor **36b3**. The FET **36b2** is turned on when the transistor **36b3** is turned on at a frequency determined by the time constant of an RC circuit that comprises a resistor **36b5** and a capacitor **36b6** and is powered by voltage from a sub-coil **36b4**.

The source of the FET **36b2** is connected to a photocoupler **36b7**. The photocoupler **36b7** is turned on in response to lighting of a photodiode on the secondary side when the secondary side voltage reaches a reference voltage, thereby turning the FET **36b2** off. The reference symbols **36b8** and **36b9** designate gate resistors for initially driving the FET **36b2**, and reference symbol **36b10** designates a resistor for current detection. The capacitor **36b11** and resistor **36b12** are for phase compensation.

The output of the secondary-side main coil **36b14** of the RCC **36b** is connected to the power circuits **40a**, **40c**, **40d**, and **40e** through a rectifier diode **36b15**. The output of the secondary-side sub-coil **36b16** is connected to the power circuit **40b** through a rectifier diode **36b17**.

The resistors **36b18** and **36b19** are components of a secondary-side voltage detector and the zener diode **36b20** is a component of a driver for driving the photodiode of the photocoupler **36b7** in response to the aforesaid reference voltage. The capacitors provided in the power circuits **40** are for smoothing.

FIG. **9** is a detailed circuit diagram showing the power circuit **40a** of FIG. **7** and the thyristors (SCRs) **240** connected thereto, more specifically the drive circuits of the thyristors **P1**, **P2** and **P3**.

As illustrated, the drive circuits **42** of the thyristors **240** comprise three photodiodes **42a**, **42b** and **42c**, three transistors **42d**, **42e** and **42f** whose emitters are connected to the photodiodes **42a**, **42b** and **42c** and whose collectors are

grounded, and three phototransistors **42g**, **42h** and **42i** optically, i.e., insulatively, connected to the three photodiodes **42a**, **42b** and **42c** to constitute photocouplers. The photodiodes **42a**, **42b** and **42c** are connected to the power supply **2** (power circuit **40b**) to be supplied with 5 V operating power. The bases of the transistors **42d**, **42e** and **42f** are connected to the effective voltage controller **26b** of the ECU **26**.

The collectors of the phototransistors **42g**, **42h** and **42i** are connected through resistors to the positive side of a capacitor **40a1** of the power supply **1** (power circuit **40a**) and the emitters thereof are connected to the gates of **P1**, **P2** and **P3** of the thyristors **240**.

In this configuration, the transistors **42d**, **42e** and **42f** are turned on when the effective voltage controller **26b** applies H (high level) signals to their bases, thereby turning on the associated photodiodes **42a**, **42b** and **42c**. As a result, the associated phototransistors **42g**, **42h** and **42i** are turned on and the current passing from the power supply **1** (power circuit **40a**) is sent to the gates of **P1**, **P2** and **P3** of the thyristors **240**, thereby driving them.

FIG. **10** is a detailed circuit diagram showing the power supply **2** (power circuit **40b**) of FIG. **7** and the thyristors **240** connected thereto, more specifically the drive circuits **42** of the thyristors **N4**, **N5** and **N6**.

As illustrated, the drive circuits **42** of the thyristors **240** comprise three transistors **42j**, **42k** and **42l**. The collectors of the transistors **42j**, **42k** and **42l** are connected through resistors to the positive side of a capacitor **40b1** of the power supply **2** (power circuit **40b**) and the emitters thereof are connected to the gates of **N4**, **N5** and **N6** of the thyristors **240**.

The bases of the transistors **42j**, **42k** and **42l** are connected through resistors to the effective voltage controller **26b** of the ECU **26**. The negative side of the capacitor **40b1** is grounded.

In this configuration, the transistors **42j**, **42k** and **42l** are turned on when the effective voltage controller **26b** applies L (low level) signals to their bases. As a result, the current passing from the power supply **2** (power circuit **40b**) is sent to the gates of **N4**, **N5** and **N6** of the thyristors **240**, thereby driving them.

FIG. **11** is a detailed circuit diagram showing the power supplies **3**, **4** and **5** (power circuits **40c**, **40d** and **40e**) of FIG. **7** and the thyristors **240** connected thereto, more specifically the drive circuits of the thyristors **N1**, **N2**, **N3**, **P4**, **P5** and **P6**.

As illustrated, the drive circuits **42** of the thyristors **240** comprise three photodiodes **42m**, **42n** and **42o**, three transistors **42p**, **42q** and **42r** whose emitters are connected to the photodiodes **42m**, **42n** and **42o** and whose collectors are grounded, and three phototransistors **42s**, **42t** and **42u** optically, i.e., insulatively, connected to the three photodiodes **42m**, **42n** and **42o** to constitute photocouplers.

The photodiodes **42m**, **42n** and **42o** are connected to the power supply **2** (power circuit **40b**) to be supplied with 5 V operating power. The bases of the transistors **42p**, **42q** and **42r** are connected to the effective voltage controller **26b** of the ECU **26**.

The collectors of the phototransistors **42s**, **42t** and **42u** are connected through resistors to the positive sides of capacitors **40c1**, **40d1** and **40e1** of the power circuits **40c**, **40d** and **40e** and the emitters thereof are connected to the gates of **N1** and **P4**, **N2** and **P5**, and **N3** and **P6** of the thyristors **240**. Thus, as regards the power supplies **3**, **4** and **5** (power circuits **40c**, **40d** and **40e**), two thyristors make one drive circuit.

Similarly to in the configuration of FIG. **9**, the transistors **42p**, **42q** and **42r** are turned on when the effective voltage controller **26b** applies H (high level) signals to their bases, thereby turning on the associated photodiodes **42m**, **42n** and **42o**. As a result, the associated phototransistors **42s**, **42t** and

42*u* are turned on and the currents passing from the power supplies 3, 4 and 5 are sent to the gates of N1 and P4, N2 and P5, and N3 and P6 of the thyristors 240, thereby driving them.

The feature that characterizes the cycloconverter generator according to this embodiment is that, as shown starting from FIG. 7, it is equipped with the single regulated DC power supply unit 36 connected to the single-phase output winding 20 to rectify the AC power output thereof to DC power, and the power circuits 40 for supplying the twelve thyristors 240 with the rectified DC power as operating power are connected to the regulated DC power supply unit 36, thereby reducing the number of power circuits 40 to five and reducing the number of drive circuits 42 connected to the power circuits 40 for driving the twelve thyristors to nine.

FIG. 12 is an explanatory diagram showing the layout of the power circuits and the like in the cycloconverter generator according to this embodiment, and FIG. 13 is a corresponding diagram for a prior art cycloconverter generator. As is clear from a comparison of FIGS. 12 and 13, the prior art configuration requires the same number of power circuits and drive circuits as the number of thyristors, namely twelve, while, in contrast, this embodiment can reduce the number of power circuits 40 and drive circuits 42 required by seven and three, respectively.

The reduction in the number of drive circuits 42 will be explained. As shown in FIG. 5, the thyristors 240 are driven in pairs, one each on the positive and negative sides, at 30-degree phase (electrical angle) intervals. For example, the two thyristors P5 and N2 are driven in the phase angle range of 0 to 30 degrees, the two thyristors P3 and N6 are driven in the phase angle range of 30 to 60 degrees, the two thyristors P1 and N4 are driven in the phase angle range of 60 to 90 degrees, and the two thyristors P5 and N2 are driven in the phase angle range of 90 to 120 degrees.

The term "driven" as used with respect to a thyristor 240 here does not mean that the thyristor is "turned on" but that its gate is supplied with current. To turn on the thyristor 240 it is necessary both for its gate to be conductive and for the input from the output terminal of the corresponding phase of the output windings 16 to be present.

The input is a sine wave in this case, so that insofar as the zero cross-point is synchronized with the phase, the input waveform is limited to either positive or negative at phase angle of 30 degrees. Therefore, even if positive side and negative side thyristors 240 are driven simultaneously, i.e., even if they are driven together at a phase angle of 30 degrees, one or the other of the positive side and negative side thyristors is not turned on and produces no output. In other words, the timing at which the positive side and negative side thyristors 240 are driven can be made the same without affecting the operation.

More specifically, even if the two thyristors P5 and N2, or the two thyristors P3 and N6, or the two thyristors P1 and N4 in FIG. 7 are driven simultaneously, neither of the two driven thyristors affects the operation of the other. The inventors accomplished this invention by focusing on this point. As shown in FIG. 7, those of the thyristors 240 which have no effect on one another's operation when operated simultaneously are grouped and assigned to common drive circuits 42. As a result, the number of drive circuits 42 is reduced to nine, i.e., to fewer than the number of thyristors 240 (twelve).

This embodiment provides a cycloconverter generator 10 equipped with:

the five (q) power circuits 40 that are connected to the single regulated DC power supply unit 36 for rectifying the AC power outputted by the single-phase output winding 20 to DC power and that supply the rectified DC power as operating

power to the twelve (p, p>q) thyristors; and the nine (r, p>r) drive circuits 42 that are connected to the five power circuits and drive the twelve thyristors 240, wherein the nine drive circuits are individually used to drive in common ones among the twelve thyristors whose operation is unaffected even if driven at the same timing, thereby making the number r of the drive circuits 42 smaller than the number p of the thyristors 240.

Owing to this arrangement, the regulated DC power supply unit 36 can, for example, be configured as the RCC 36*b*, which facilitates independent or dispersed establishment of the power circuits, with the result that number r of the drive circuits of the thyristors 240 can be made smaller than the number p of the thyristors.

Moreover, since the drive circuits 42 are individually used to drive in common ones among the p-number of thyristors whose operation is unaffected even if driven at the same timing, the number r of the drive circuits 42 can be made smaller than the number p of the thyristors, whereby the numbers q and r of the power circuits 40 and drive circuits 42 of the thyristors 240 can be reduced to enable circuit simplification, circuit miniaturization, parts count reduction, and cost reduction.

Further, the provision of the power circuits 40 of the thyristors 240 individually makes it possible to set the power supply voltage at the minimum sufficient for driving the gates of the thyristors 240, so that it becomes possible to build the drive circuits 42 using phototransistors and other low-voltage components.

Although the drive circuits 42 are shown in FIG. 9, for example, to use photodiodes and phototransistors, this is not a limitation. Namely, it is possible instead to use a pulse transformer 44 as shown in FIG. 14 or a phototriac 46 as shown in FIG. 15.

As stated in the foregoing, this embodiment is configured to have a cycloconverter generator (10) equipped with a magneto (14) having three-phase output windings (16), single-phase output windings (20) facing the permanent magnets to produce phase signals each indicative of a phase of the output of the magneto, a bridge circuit (24) comprising p (i.e., twelve) number of thyristors (240) bridge-connected in anti-parallel connection to the three-phase output windings to constitute a cycloconverter, and a bridge drive circuit (ECU 26, polarity switching controller 26*a*, effective voltage controller 26*b*) that generates single-phase AC power to be supplied to a load by turning on the p number of the thyristors of the bridge circuit at variable timing every half-period of a desired AC power frequency based on the phase signal; comprising: a single (regulated) DC power supply unit (36) that is connected to the single-phase output winding and rectifies AC power outputted by the single-phase output winding to DC power; q (e.g., five) number of power circuits (40) that are connected to the DC power supply unit and supply the rectified DC power as operating power to the p (p>q) number of the thyristors; and r (e.g., nine; p>r) number of thyristor drive circuits (42) that are connected to the q number of the power circuits and drive the p number of the thyristors, wherein the r number of the thyristors drive circuits are individually used to drive in common ones among the p number of the thyristors whose operation is unaffected even if driven at the same timing such that the number r of the drive circuits is made smaller than the number p of the thyristors.

In the generator, the single DC power supply unit (36) comprises a ringing choke converter.

In the generator, the p number of the thyristors (240) comprises a total of p/2 (e.g., six) number of positive group of thyristors (P_n) arranged in three parallel connected pairs with

their cathodes facing the positive side and a total of $p/2$ (e.g., six) number of negative group of thyristors (N_n) arranged in three parallel connected pairs with their cathodes facing the negative side.

In the generator, the thyristors (240) whose operation is unaffected even if driven at the same timing are one of the positive group thyristors (P_n) and one of the negative group of thyristors (N_n).

In the generator, the thyristor drive circuit (42) comprises photodiodes and phototransistors.

It should be noted that, although the thyristor is used as a switching element, an FET or the like can be utilized instead.

It should also be noted that, although the phase signal (V -phase pulse) is detected from the output of the output winding 20 facing the rotor installed with the permanent magnets, it can be detected using a hall IC or a pickup coil.

Japanese Patent Application No. 2008-123325 filed on May 9, 2008, is incorporated herein in its entirety.

While the invention has thus been shown and described with reference to specific embodiments, it should be noted that the invention is in no way limited to the details of the described arrangements; changes and modifications may be made without departing from the scope of the appended claims.

What is claimed is:

1. A cycloconverter generator equipped with a magneto having three-phase output windings, single-phase output windings facing the permanent magnets to produce phase signals each indicative of a phase of the output of the magneto, a bridge circuit comprising p number of thyristors bridge-connected in antiparallel connection to the three-phase output windings to constitute a cycloconverter, and a bridge drive circuit that generates single-phase AC power to be supplied to a load by turning on the p number of the

thyristors of the bridge circuit at variable timing every half-period of a desired AC power frequency based on the phase signal, comprising:

a single DC power supply unit that is connected to the single-phase output winding and rectifies AC power outputted by the single-phase output winding to DC power;
 q number of power circuits that are connected to the DC power supply unit and supply the rectified DC power as operating power to the $p(p>q)$ number of the thyristors; and

$r(p>r)$ number of thyristor drive circuits that are connected to the q number of the power circuits and drive the p number of the thyristors,

wherein the r number of the thyristor drive circuits are individually used to drive in common ones among the p number of the thyristors whose operation is unaffected even if driven at the same timing such that the number r of the drive circuits is made smaller than the number p of the thyristors.

2. The generator according to claim 1, wherein the single DC power supply unit comprises a ringing choke converter.

3. The generator according to claim 1, wherein the p number of the thyristors comprise a total of $p/2$ number of positive group of thyristors arranged in three parallel connected pairs with their cathodes facing the positive side and a total of $p/2$ number of negative group of thyristors arranged in three parallel connected pairs with their cathodes facing the negative side.

4. The generator according to claim 3, wherein the thyristors whose operation is unaffected even if driven at the same timing are one of the positive group of thyristors and one of the negative group of thyristors.

5. The generator according to claim 1, wherein the thyristor drive circuit comprises photodiodes and phototransistors.

* * * * *