


2MHZ Ultrasonic Transducer (mounted outside)

Model: **PH02000KA**

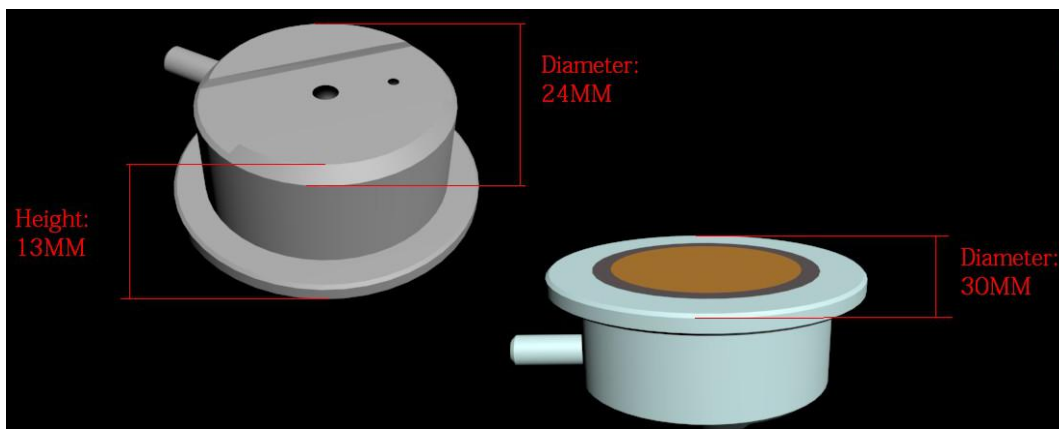

No.	Item	Parameters
1	Center frequency	2.0MHZ
2	Launched wave beam angle (-3dB full opening angle)	±10%
3	Measure distance	0.015—2m
4	Blond zone	<15mm
5	Beam width	3°
6	Static capacitance	1800PF±20%
7	Minimum parallel impedance	60Ω±30%
8	Maximum working voltage(Pulse (duty cycle 2%)	<200V
9	Operating temperature	-20~70°C
10	Protection Level	IP67
11	Case Material	Aluminum Alloy
12	Dimension(diameter*height,mm)	Φ30mm*13mm
13	Cable length	1meter(normal)
14	Weight	102g