

AX5326/5327/5328 3-STATE ENCODER/DECODER

The AX5326/5327/5328 is a series of encoder/decoder (transmitter/receiver) ICs, all fabricated in low-power CMOS technology. The AX5326 is an encoder and, the AX5327 and the AX5328 are decoders. The AX5326 can be coupled with either AX5327 or AX5328 to form an encoder/decoder (transmitter/receiver) system. The difference between the AX5327 and the AX5328 is that, if the AX5326 is coupled with the AX5327, four bits of data can be sent from the AX5326 to the AX5327, while the AX5328 does not have this function.

The AX5326 can accept 12 bits of input data, and serially transmits these 12 bits of data out in encoded format. The logic state of the input data can be either 0, 1, or open. The circuitry of the AX5326 is designed to have the capability to detect 0, 1, or open.

The AX5327 receives both code and data (to be explained later). Upon reception of valid code, the AX5327 issues a VT (valid transmission) signal and sends out 4 bits of received data.

The AX5328 receives codes only. If a valid code is received, the AX5328 issues a VT (valid transmission) signal.

A wide variety of medium, such as infrared, radio frequency, or ultrasonic wave, can be used as transmission medium.

FEATURES:

- * Wide operating voltage range, 3.5 -- 13 volts.
- * Low standby current and low-power consumption.
- * On-chip RC-oscillator.
- * Highly reliable transmission/reception protocol.
- * Auto-power-off function.
- * Easy interface with transmission media.
- * Few external components needed for a complete encoder/decoder (transmitter/receiver) system.
- * A maximum of 531441 codes available.
- * wide application in home security system, alarm system, garage/car door control, remote control, etc.

@ VDD=12 VOLTS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
OPERATING VOLTAGE	VDD	3.5	5	13	VOLT
STANDBY CURRENT	ISTD		1.0	3.0	UA
SOURCE CURRENT (VT PIN)	IOH	2.0			MA
SINK CURRENT (VT PIN)	IOL	2.0			MA
SOURCE/SINK CURRENT (AC -- ALL PINS)	IIN			1	MA
OPERATING TEMP.	TOP	-20		70	C
STORAGE TEMP.	TSTR	-40		100	C

SUCCESSFUL ENROLLMENT WITHOUT

441 19th St. S.W. Wash. D.C. 20037

ALL IN

1. The first part of the document is a list of names and titles, including "The Hon. Mr. Justice" and "The Hon. Mr. Justice".

AX5327


A0	1	18	VDD
A1	2	17	VT
A2	3	16	OSC1
A3	4	15	OSC2
A4	5	14	DIN
A5	6	13	D3
A6	7	12	D2
A7	8	11	D1
VSS	9	10	D0

pin no.	pin name	description
1 -- 8	A0 -- A7	code inputs.
9	VSS	ground.
10	D0	frame bit-8 data output.
11	D1	frame bit-9 data output.
12	D2	frame bit-10 data output.
13	D3	frame bit-11 data output.
14	DIN	serial data input.
15	OSC2	oscillator connection.
16	OSC1	oscillator connection.
17	VT	valid transmission
18	VDD	positive power supply


ASLIC MICROELECTRONICS CORP.

TRANSMISSION DATA FRAME

The AX5326 is capable of encoding 12 bits of input data. The interpretation of these 12 bits of data, called a FRAME, depends on the application. If the AX5326 is used together with the AX5327 to form an encoder/decoder (transmitter/ receiver) pair, the first 8 bits (bit0 -- bit7) of the frame is interpreted by the AX5327 as CODE and the last 4 bits (bit8 -- bit11) of the frame is interpreted as DATA. On the other hand, if the AX5326 is used together with the AX5328, the whole 12 bits of data is interpreted by the AX5328 as CODE.

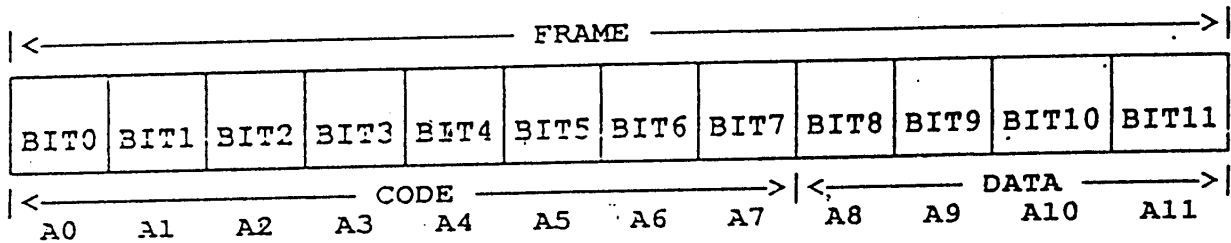

The input data is encoded by the AX5326 and sent out serially four times through the DOUT pin for each low pulse on the TE pin. The data encoding format is as follows:

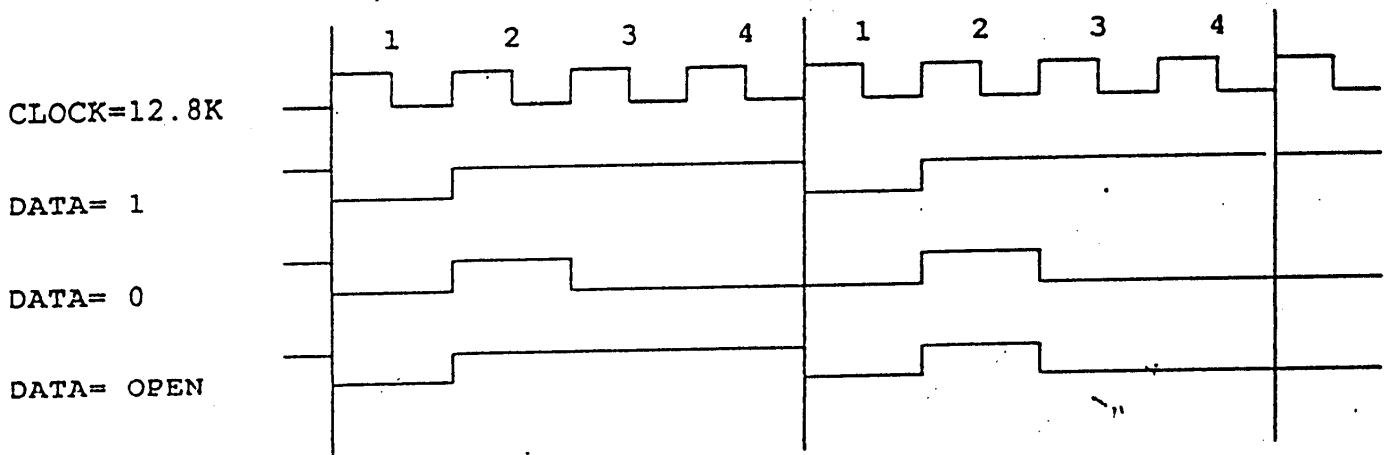


Note: the 12.8 KHz CLOCK is the internal operating clock.

PACKAGE

The AK5326/5327/5329 are available in 18-pin DIL package.

AK5326 TRANSMITTER TIMING DIAGRAM

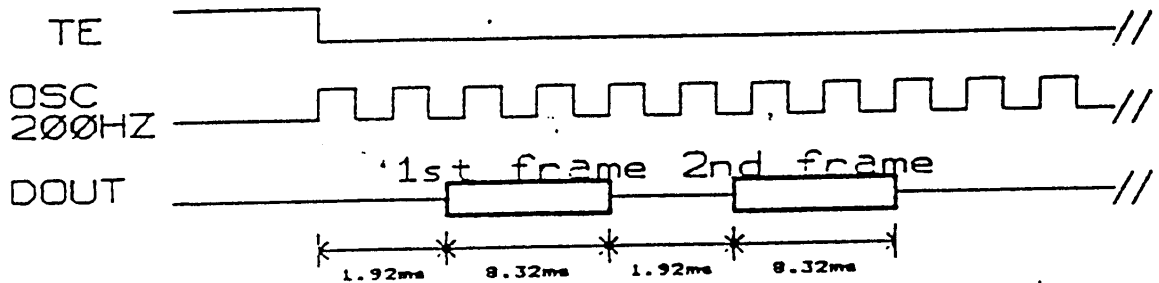

NOTE: 1) A frame needs a total of $(1.92 + 8.32)$ ms to transmit.
 So, each transmission needs:
 $(1.92 + 8.32) \times 4 = 40.96$ ms .

2) The above timing diagram is not proportional in time-scale.

B) AX5326 ENCODER AND AX5328 DECODER

The following description is for the case when the AX5326 is used as the encoder and the AX5328 is used as the decoder. In this application, no data can be sent, but more codes are available. Please refer to the application diagram.

- 1) The A0 -- All inputs of the AX5326 is set to the desired code. The logic state of these input pins can be either 1, 0, or open. So, totally $3^{*}12 = 531441$ codes are available. The encoding format is the same as that described in section A.
- 2) The A0 -- All inputs of the AX5327 is also set to the desired code.
- 3) Force a LOW pulse to the TE. (transmission enable) pin of the AX5326. This low pulse triggers the oscillator to oscillate, and then the code is sent out serially FOUR times. A0 is the first bit sent out. Please refer to the AX5326 transmitter timing diagram.
- 4) Upon reception of TWO continuous valid codes, that is, the received A0 -- All matches with AX5328's A0--All, the VT (valid transmission) pin of the AX5328 is raised to high. The VT pin will stay high until the data stop coming in.

RC-OSCILLATOR

Only an external resistor with 5% tolerance is needed for the RC-oscillator of the AX5326/5327/5328. The value of the oscillator decides the oscillating frequency. For example, if the value of the resistor is 80 Kohm, the oscillator will oscillate at 200 KHz.


A user can choose proper value of resistor for his specific application, but the resistor value of the encoder and the decoder must be the same. For frequency vs. resistor relation, please refer to the OSC ANALYSIS DIAGRAM.

POWER-ON-RESET


On power-on, the internal power-on-reset circuits of the AX5326/5327/5328 set their output pins to the following logic states.

- A) AX5326
DOUT pin is at logic low state.
- B) AX5327
VT pin and D0 -- D3 pins are at logic low state.
- C) AX5328
VT pin is at logic low state.


OSC ANALYSIS DIAGRAM

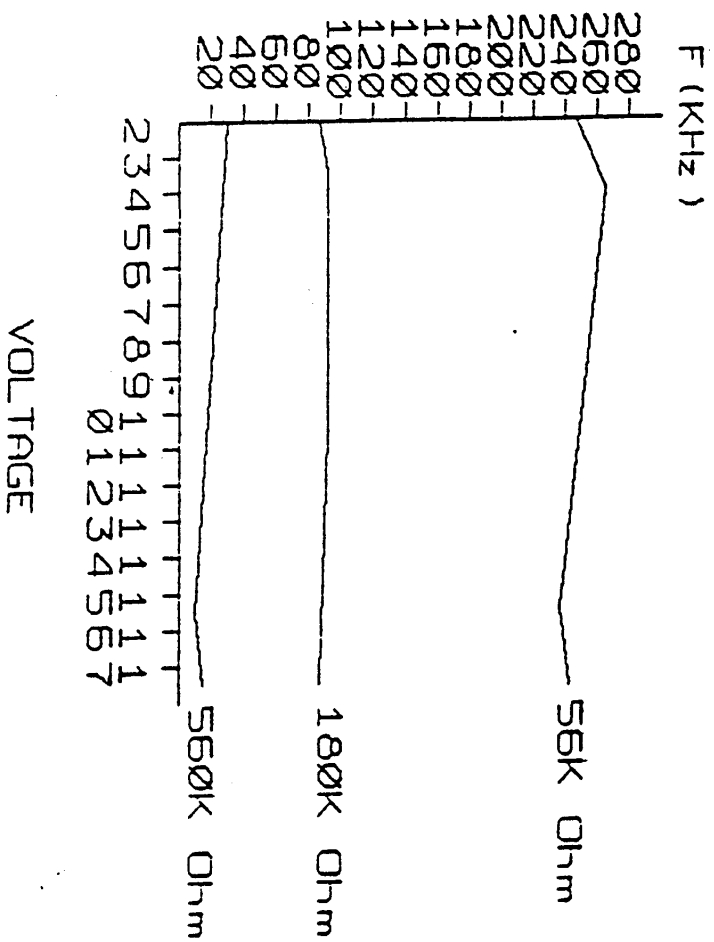

AX5326/AX5327 TYPICAL APPLICATION DIAGRAM

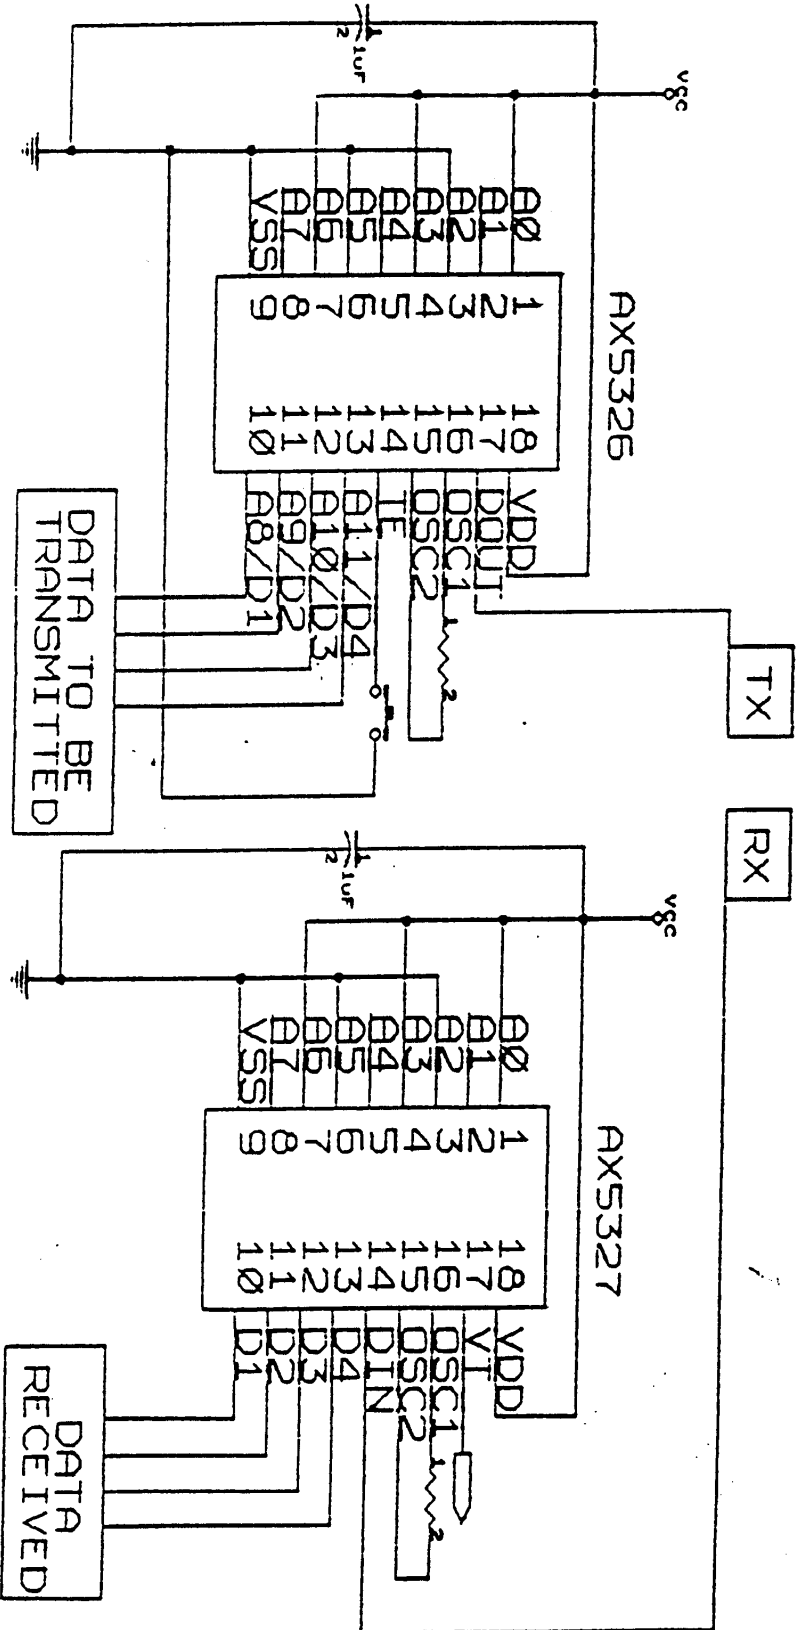

AX5326/AX5327 APPLICATION DIAGRAM

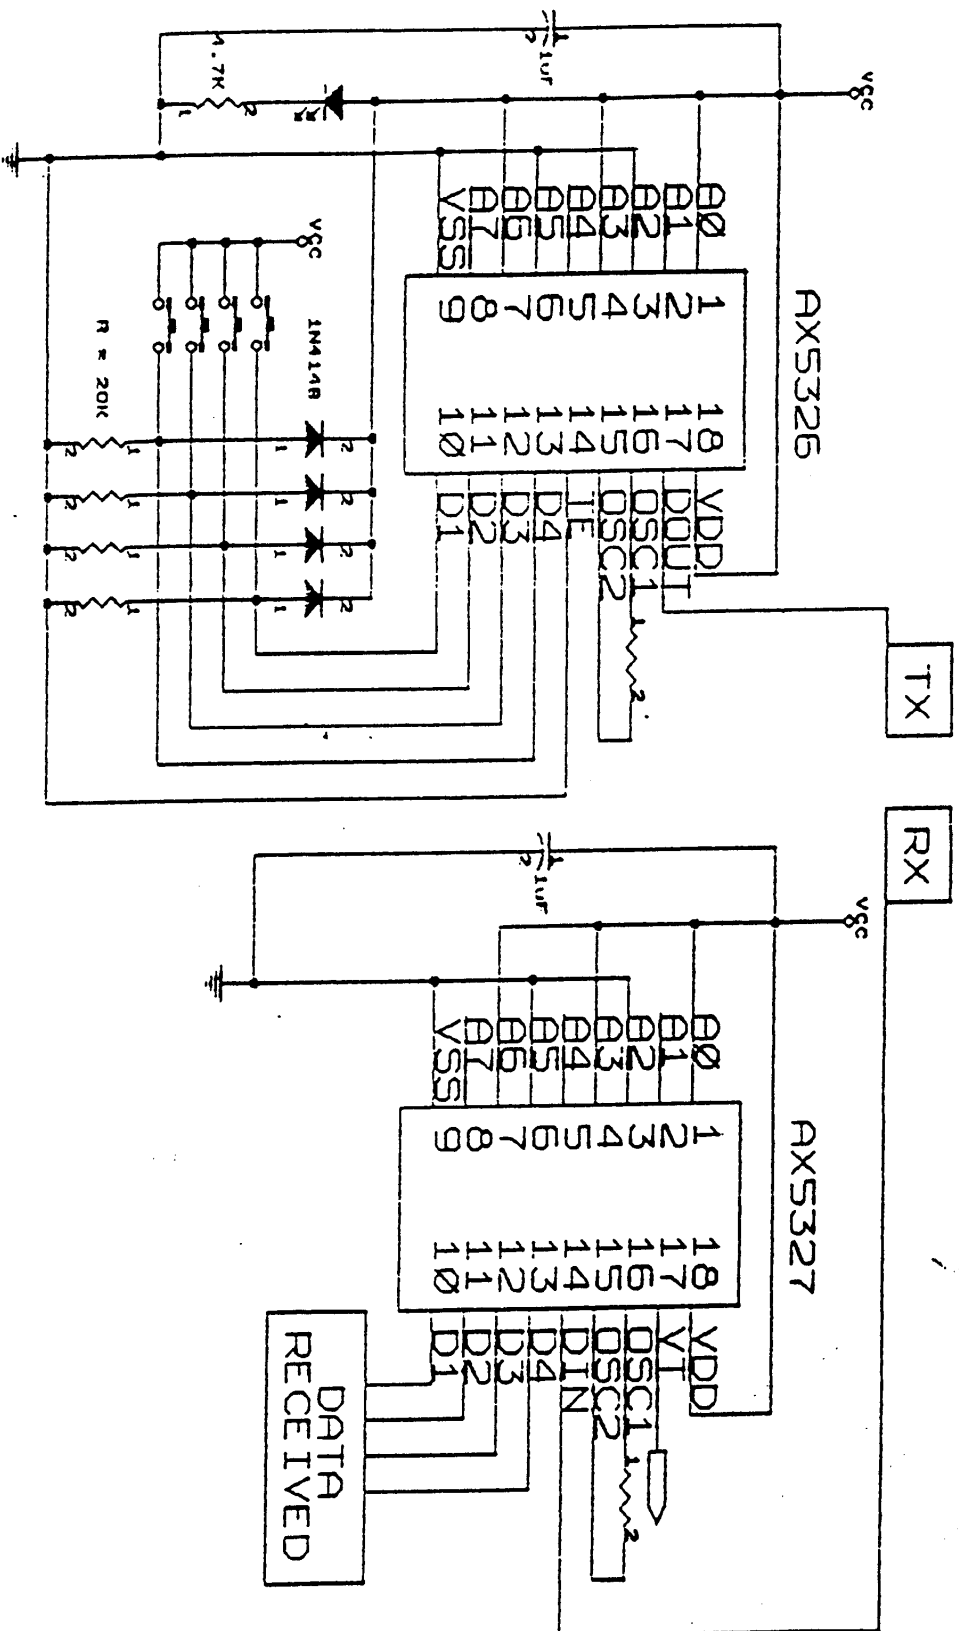

DATA
RECEIVED

PIN ASSIGNMENT & DESCRIPTION

AX5326

A0	1	18	VDD
A1	2	17	DOUT
A2	3	16	OSC1
A3	4	15	OSC2
A4	5	14	TE
A5	6	13	A11/D3
A6	7	12	A10/D2
A7	8	11	A9/D1
VSS	9	10	A8/D0

pin no.	pin name	description
1 -- 8	A0 -- A7	code input.
9	VSS	ground.
10	A8/D0	code/data input.
11	A9/D1	code/data input.
12	A10/D2	code/data input.
13	A11/D3	code/data input.
14	TE	transmission enable input with internal pull-up resistor.
15	OSC2	oscillator connection.
16	OSC1	oscillator connection.
17	DOUT	encoded serial data output.
18	VDD	positive power supply.

OSCILLATOR
204. OK

204. CK

[illegible]

CLOCK=12. OK

CLDCK=12.8K

0.3125

Output 5.11

1. ~~WGS=0.12549~~

27 CLOCK = * NEXT WORD
1.07519

B111	B112	B113	B114	B115	B116	B117	B118	B119	B1110	B1111	B1112	...	B111
OPEN	OPEN	1	0	OPEN	0	1	0	1	OPEN	0	OPEN		OPEN

OPEN

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100. 101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200. 201. 202. 203. 204. 205. 206. 207. 208. 209. 210. 211. 212. 213. 214. 215. 216. 217. 218. 219. 220. 221. 222. 223. 224. 225. 226. 227. 228. 229. 230. 231. 232. 233. 234. 235. 236. 237. 238. 239. 240. 241. 242. 243. 244. 245. 246. 247. 248. 249. 250. 251. 252. 253. 254. 255. 256. 257. 258. 259. 260. 261. 262. 263. 264. 265. 266. 267. 268. 269. 270. 271. 272. 273. 274. 275. 276. 277. 278. 279. 280. 281. 282. 283. 284. 285. 286. 287. 288. 289. 290. 291. 292. 293. 294. 295. 296. 297. 298. 299. 300. 301. 302. 303. 304. 305. 306. 307. 308. 309. 310. 311. 312. 313. 314. 315. 316. 317. 318. 319. 320. 321. 322. 323. 324. 325. 326. 327. 328. 329. 330. 331. 332. 333. 334. 335. 336. 337. 338. 339. 340. 341. 342. 343. 344. 345. 346. 347. 348. 349. 350. 351. 352. 353. 354. 355. 356. 357. 358. 359. 360. 361. 362. 363. 364. 365. 366. 367. 368. 369. 370. 371. 372. 373. 374. 375. 376. 377. 378. 379. 380. 381. 382. 383. 384. 385. 386. 387. 388. 389. 390. 391. 392. 393. 394. 395. 396. 397. 398. 399. 400. 401. 402. 403. 404. 405. 406. 407. 408. 409. 410. 411. 412. 413. 414. 415. 416. 417. 418. 419. 420. 421. 422. 423. 424. 425. 426. 427. 428. 429. 430. 431. 432. 433. 434. 435. 436. 437. 438. 439. 440. 441. 442. 443. 444. 445. 446. 447. 448. 449. 450. 451. 452. 453. 454. 455. 456. 457. 458. 459. 460. 461. 462. 463. 464. 465. 466. 467. 468. 469. 470. 471. 472. 473. 474. 475. 476. 477. 478. 479. 480. 481. 482. 483. 484. 485. 486. 487. 488. 489. 490. 491. 492. 493. 494. 495. 496. 497. 498. 499. 500. 501. 502. 503. 504. 505. 506. 507. 508. 509. 510. 511. 512. 513. 514. 515. 516. 517. 518. 519. 520. 521. 522. 523. 524. 525. 526. 527. 528. 529. 530. 531. 532. 533. 534. 535. 536. 537. 538. 539. 540. 541. 542. 543. 544. 545. 546. 547. 548. 549. 550. 551. 552. 553. 554. 555. 556. 557. 558. 559. 560. 561. 562. 563. 564. 565. 566. 567. 568. 569. 570. 571. 572. 573. 574. 575. 576. 577. 578. 579. 580. 581. 582. 583. 584. 585. 586. 587. 588. 589. 590. 591. 592. 593. 594. 595. 596. 597. 598. 599. 600. 601. 602. 603. 604. 605. 606. 607. 608. 609. 610. 611. 612. 613. 614. 615. 616. 617. 618. 619. 620. 621. 622. 623. 624. 625. 626. 627. 628. 629. 630. 631. 632. 633. 634. 635. 636. 637. 638. 639. 640. 641. 642. 643. 644. 645. 646. 647. 648. 649. 650. 651. 652. 653. 654. 655. 656. 657. 658. 659. 660. 661. 662. 663. 664. 665. 666. 667. 668. 669. 670. 671. 672. 673. 674. 675. 676. 677. 678. 679. 680. 681. 682. 683. 684. 685. 686. 687. 688. 689. 690. 691. 692. 693. 694. 695. 696. 697. 698. 699. 700. 701. 702. 703. 704. 705. 706. 707. 708. 709. 710. 711. 712. 713. 714. 715. 716. 717. 718. 719. 720. 721. 722. 723. 724. 725. 726. 727. 728. 729. 730. 731. 732. 733. 734. 735. 736. 737. 738. 739. 740. 741. 742. 743. 744. 745. 746. 747. 748. 749. 750. 751. 752. 753. 754. 755. 756. 757. 758. 759. 760. 761. 762. 763. 764. 765. 766. 767. 768. 769. 770. 771. 772. 773. 774. 775. 776. 777. 778. 779. 780. 781. 782. 783. 784. 785. 786. 787. 788. 789. 790. 791. 792. 793. 794. 795. 796. 797. 798. 799. 800. 801. 802. 803. 804. 805. 806. 807. 808. 809. 810. 811. 812. 813. 814. 815. 816. 817. 818. 819. 820. 821. 822. 823. 824. 825. 826. 827. 828. 829. 830. 831. 832. 833. 834. 835. 836. 837. 838. 839. 840. 84

Q.DCK:=12. OK

MAXX-55-1

NOTE: 5.9-6

OXOTF-555=(M'EN

| | |
|----|----|
| 1 | 1 |
| 10 | 10 |
| 1 | 10 |

欢迎索取免费详细资料、设计选型指南和光盘、样品；产品繁多未能尽录，欢迎来电查询。

中国传感器科技信息网：[HTTP：//WWW.SENSOR-IC.COM/](http://WWW.SENSOR-IC.COM/)

工控安防网：[HTTP：//WWW.PC-PS.NET/](http://WWW.PC-PS.NET/)

消费电子专用电路网：[HTTP://WWW.SUNSTARE.COM/](http://WWW.SUNSTARE.COM/)

E-MAIL：xjr5@163.com szss20@163.com

MSN：suns8888@hotmail.com

QQ：195847376

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83376549 83376489 83387030 83387016

传真：0755-83376182 83338339 邮编：518033 手机：(0)13902971329

深圳展销部：深圳华强北路赛格电子市场 2583 号 TEL/FAX：

0755-83665529 25059422

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-82613476

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382

成都：TEL:(0)13717066236

技术支持：0755-83394033 13501568376