


6. Exploded View & Parts List

6-1 CK20H1VR5X/NWT

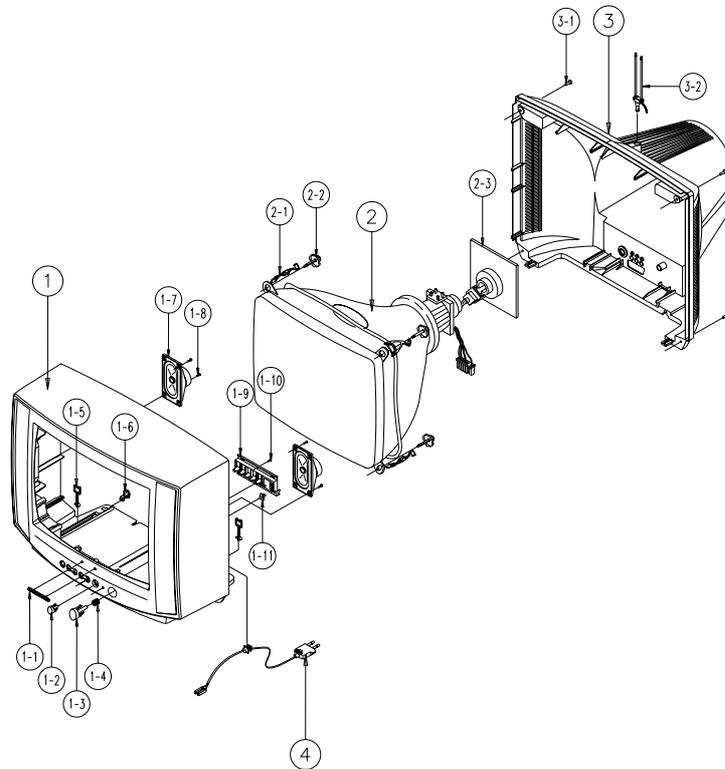

No	Code No	Description	Specification	Q'ty	Remark
1	AA91-10370L	ASSY-CABINET,FRONT	-,501H,(SPK)BK708P MLPG,HB,BLK	1	
	AA64-31230J	CABINET-FRONT	-,50H1,BK708P MLPG,HIPS,HB,BLK	1	
1-1	AA64-70123B	BADGE-BRAND	AL,R2000,SILVER,L=50,SAMSUNG,-	1	
1-2	AA64-40495A	WINDOW-REMOCON	-,331,501H,-,PC,-,VIOLET,-	1	
1-3	AA64-10768D	KNOB-POWER	-,33,501H,NO-SILK,ABS,HB,BLK	1	
1-4	AA61-60003J	SPRING-CS	-,SUS304,0.5,OD6,H12,N7,-,-,-	1	
1-5	AA65-30105A	CLAMP-WIRE	NYLON 66,V2,NTR,15MM,ALL MODEL	2	
1-6	AA61-40113A	STOPPER-PCB	501H,HIPS,NTR,HB,-,-	1	
1-7	3001-000191	SPEAKER	3W,8ohm,90dB,180Hz	2	
1-8	6003-001026	SCREW-TAPTITE	RH,+ ,B,M4,L15,ZPC(BLK),SWRCH18	4	
1-9	AA64-10767A	KNOB-CONTROL	-,,-,-,ABS,HB,BLK	1	
1-10	6003-001026	SCREW-TAPTITE	RH,+ ,B,M4,L15,ZPC(BLK),SWRCH18	1	
1-11	AA64-40496A	INDICATOR-LED	-,,-,-,ACRYL,-,-,-	1	
2	AA03-10029W	CRT-COLOR	-,A48KRD82X(H),+380mG,20,90de	1	
2-1	AA65-30107A	CLAMP-D,COIL	NYLON 66,V2,NTR,-,20-22 INCH,-	4	
2-2	AA60-10050R	SCREW-ASSY	WC,HH,+ ,M5,L31.5,SWRCH18A,ZPC(4	
2-3	3704-001090	SOCKET-CRT	9P,15.24PI,26.5PI,SN,-	1	
3	AA64-31231B	CABINET-BACK	-,501H,-,HIPS,V2,BLK,-,-	1	
3-1	6003-001026	SCREW-TAPTITE	RH,+ ,B,M4,L15,ZPC(BLK),SWRCH18	4	
3-2	AA42-10001V	ANT-ROD	-,3S,620mm,BRN,UL/CSA	1	
4	AA39-10001G	POWER-CORD	-,KKP-419C,KLCE-2F,2.286m,HOUS	1	